


**LP99 - TRACK LIMITER**

## TRACK ACCESSORIES - SINGLE CIRCUIT

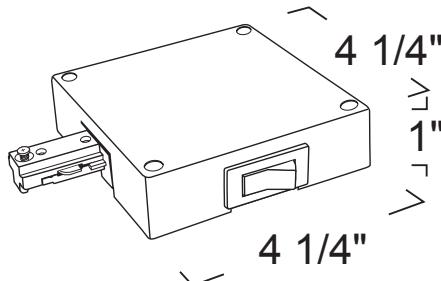

Limits current to track to save energy and meet new stringent energy codes such as ASHRAE/IESNA 90.1. For CEC version use -CEC as Suffix.

**SPECIFICATION**

**Mounting** - Electrical feed mounts directly to surface for through ceiling wiring. Cover plate and feed mounts directly to 4 inch octagonal electrical box (by others).

**Construction** - track limited housing constructed of injection molded polycarbonate. Black plate constructed of galvanized steel."

**Electrical** - Operates on nominal 120vac. Integral switchable thermal circuit breaker combines on/off switch and circuit protection for specified load. Device will interrupt power based on time versus current trip when specified load is exceeded. Electrical connections are concealed in an isolated liner.

**Type:** Multiple Configurations Available in Live End Feed, In Line Feed and L- Shape Feed.

**Circuit:** Available in 1 Circuit and 2 Circuit.

**Finish:** Available in All White and Black Casing/ White Switch.

**Label:** UL Listed, cETL Listed, Damp Location


**COMPATIBILITY**


LP



LPC

1 CCT TRACK CHANNEL

2 CCT TRACK CHANNEL

Note: Wattage limitations on compatible items must be met.

**FEATURE:**


ORDERING EXAMPLE : LP991168W

LP99	TYPE	CIRCUIT	WATTAGE	FINISH
LP99	1	:Live End Feed	Blank :1 Circuit	W :All White
	2	:In Line Feed	C :2 Circuit	B :Black Casing/ White Switch
	3	:L- Shape Feed		
			12 :120W/1A-	
			30 :300W/2.5A+	
			60 :600W/5A+	
			90 :900W/7.5A-	
			108 :1080W/9A-	
			120 :1200W/10A-	
			132 :1320W/11A-	
			144 :1440W/12A-	
			156 :1560W/13A-	
			168 :1680W/14A-	

\* Extended lead times apply. Consult factory for All Black or other Wattages

ID #: 1460