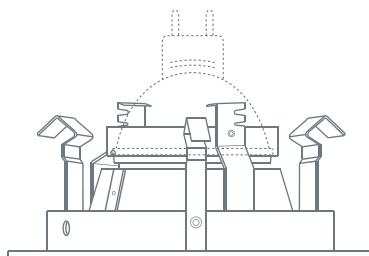
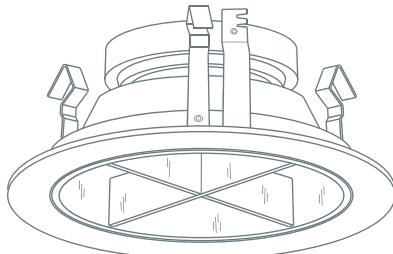


LR1303 - CROSS BLADE
 3" LOW VOLTAGE TRIMS


2 7/8"

4 3/8"


SPECIFICATION

12V 50W Max MR16 GU5.3

Application: Used for both general and accent lighting with excellent results. Allows for the precision lighting of miniature lamps in small areas such as niches and casework. This produces an environment with powerful illumination, yet without drawing attention to its source.

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Lens Inclusion: Clear glass protective safety lens included in packaging.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Reflector Finish: Spun Aluminum Reflector Available in Black and Clear.

Ring Finish: Die-Cast Aluminum Trim Ring Available in White, Black and Natural.

Accessories: Takes (1) 2" Media.

Label: UL Listed, cETL Listed

COMPATIBILITY

LH1399	LH1399R	LSH1399
STANDARD HOUSING	REMODEL HOUSING	SHALLOW HOUSING
LH1399IC	LSH1399RE	LSH1399IC
IC DOUBLE WALL HOUSING	SHALLOW REMODEL HOUSING	SHALLOW IC HOUSING

Note: Wattage limitations on compatible items must be met.



ORDERING EXAMPLE : LR1303C

FEATURE:	REFLECTOR FINISH	RING FINISH	RATING	ACCESSORIES
LR1303	C :Clear	Blank :White	Blank :Damp Location	/L38 :Clear Lens
LR1303	C :Clear	Blank :White	Blank :Damp Location	/L40 :Yellow Lens
				/L41 :Blue Lens
				/L42 :Amber Lens
				/L43 :Green Lens
				/L44 :Daylight Blue Lens
				/L48 :Lens with Internal Louver Filter
				/L49 :Frosted Soft Focus
				/L50UV :UltraViolet Filter
				/L53 :Micro - Prismatic Spread Lens
				/L55 :Linear Spread Lens
				/LL16B :Black
				/LL16C :Clear

ID# : 256