


LSHFR99-QC - 4" IC 2HR FIRE-RATED LED HOUSING (SHALLOW)



Ceiling Cut-Out: 4-3/8"

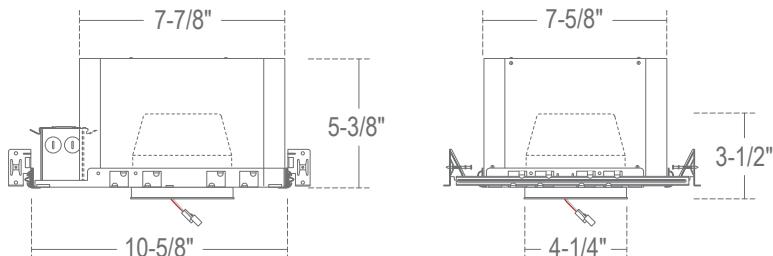

SPECIFICATION

Application: This energy efficient General Purpose recessed LED housing is perfect for low to medium height ceilings in residential and light commercial applications. A variety of trim styles, finishes and beam spreads are available to achieve a desired look.

Fire Rating: Stops the progress of an active fire. Meets the fire-stop capabilities of a typical 5/8" gypsum board (drywall) barrier. Eliminates the requirement to specify more expensive fire-rated materials or the use of manually constructed drywall enclosures.

Patented dual-layer housing is constructed of 20-gauge aluminum designed to maintain the continuity of fire-rated ceiling assemblies, subject to L500. UL Certifications and Approvals for Two-Hour Fire Rating: UL263, CAN/ULC S101-07, E119-00A, UBC7-1, NFPA251 and ASI A2.1 under U.S. Patent

Housing: Pre-wired housing adjusts up to a 1 1/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured via positive retention friction clips.

Mounting: Housing suitable for new construction installations only, supplied with (2) 24" adjustable hanger bars with 90 degrees repositioning ability. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.

Power Connection: LED heat sunked lamp module is replaceable via onboard quick exclusionary disconnect terminal. No tools required. Meets CA Title 24 Requirements and other standards restricting the use of Medium Base or Bi-Pin Sockets.

Emergency Options: Emergency LED Battery Back-up available, remotely mounted adjacent to housing by installer. When AC power fails, the device immediately switches to the emergency mode, operating the LEDs for a minimum of 90 minutes. Remote test switch and plate cover included. Optional Generator Transfer Device switches the driver to auxiliary generator power during the loss of normal AC power, (recommended for applications requiring individual circuit switching).

Junction Box: 16 gauge pre-wired galvanized steel Junction Box, 32 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with one 1-1/8", one 1/2", three 7/8" knockouts and four Romex prysouts with strain relief. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: Energy Efficient LED housing comes standard with IC rating for direct contact with loosefill blown and rolled insulation.

Airflow: Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

COMPATIBILITY

		
LRESQLD402	LREQLD402	LRELD402
SQUARE/SQUARE (DIMMABLE)	SQUARE REFLECTOR (DIMMABLE)	REFLECTOR FLAT LENS (DIMMABLE)
		
LRELD403	LRELD442	LRELD443
BAFFLE FLAT LENS (DIMMABLE)	REFLECTOR DOME LENS (DIMMABLE)	BAFFLE DOME LENS (DIMMABLE)
		
LREBLD402	LRELD400	LRELD467
REFLECTOR FLAT LENS (DIMMABLE)	4" ECONOMY LED LENSED (DIMMABLE)	ADJUSTABLE PULL DOWN (DIMMABLE)
		
LRLD4W-QC	LRELD488W	LRELDQ488W
4 LED REFLECTOR	ADJUSTABLE GIMBAL	ADJUSTABLE SQUARE GIMBAL

Note: Wattage limitations on compatible items must be met.

Safety Labels: ETL/CETL listed. Suitable for damp locations. NYC approved: Calendar #41937. STC (Sound Transmission Class), and IIC (Impact Insulation Class) compliant.

FEATURE:   

ORDERING EXAMPLE : LSHFR99-QC

LSHFR99-QC	OPTIONS
LSHFR99-QC	Blank :None
-EM	:Emergency Backup