

# 1-DIRECTIONAL LED WALL MOUNT

8"x4" | SCOOP AND TRAPEZOID | 1-DIRECTIONAL LED WALL MOUNT | IP65 | 850 LM

LITON's WD1 Series directional Wall luminaire can be used in both interior and outdoor settings and can be pointed up or down.

## Benefits

- Sleek architectural design
- Durable, corrosion resistant finish
- Emergency back up available
- 5 year limited warranty



## Application

Typical locations are in commercial and retail spaces that contain walls and/or columns that require directional lighting. Can be used as a downlight for direct illumination or an uplight for indirect illumination of architecture facades.

## Housing

Constructed from a two (2) piece high grade die-cast aluminum with a high grade powder coat finish. Includes a clear tempered glass lens (sits flush to the housing), LED array, reflector, LED driver, silicone gasket and a wire exit hole to junction box wiring. The two piece housing is secured together by four (4) tamper resistant stainless steel set screws.



Scoop (WD1472)

## Mounting

Fixture mounts into a wall directly over standard 3-1/2" junction box or other similar size junction boxes.



Trapezoid (WD1473)

## Emergency Options

Emergency LED Battery Back-up available, remotely mounted adjacent to housing by installer. When AC power fails, the device immediately switches to the emergency mode, operating the LEDs for a minimum of 90 minutes. Remote test switch, plate cover and junction box included.

## Listing

ETL/cETL Listed. Suitable for wet location. Assembled in USA. (IP65).

## Lumen Maintenance

Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results. See ordering guide for delivered lumens.

## Dimming

(-DUN) option is a universal dimming system that works with most 3-Wire ELV, 2-Wire Incandescent and 5-Wire 0-10V fluorescent dimmers.

## Electrical

AC 50/60Hz Electronic Direct Current Class 2 driver integrally mounted. Power Factor > 0.90. For cold weather applications (-22°C and above) use -DUN driver option.

## Warranty

Covered by a 5 Year Warranty to be free of defects in materials and craftsmanship. Fixture should not be installed in applications with ambient temperature above 60°C. Doing so will result in reduced lamp life and voided warranty.



## 1-DIRECTIONAL LED WALL MOUNT

8"x 4" | SCOOP AND TRAPEZOID | 1-DIRECTIONAL LED WALL MOUNT | IP65 | 850 LM


## WD1472 8"x 4" SCOOP 1-DIRECTIONAL LED WALL MOUNT

850LM | WALL SURFACE MOUNT | 15W | IP65



Front

Side

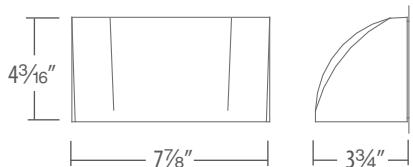

- Ideal for Interior and outdoor settings
- Used as an uplight (indirect) or downlight (direct)
- Includes mounting bracket for installation
- Dimming option available


## WD1473 8"x 4" TRAPEZOID 1-DIRECTIONAL LED WALL MOUNT

850LM | WALL SURFACE MOUNT | 15W | IP65



Front

Side

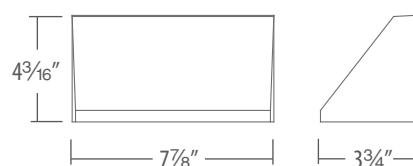

- Ideal for Interior and outdoor settings
- Used as an uplight (indirect) or downlight (direct)
- Includes mounting bracket for installation
- Dimming option available

## LED 1-DIRECTIONAL WALL-MOUNT ORDERING

Example: WD1472B-FRUE-DUN-T30-EMAC

ITEM #	FINISH	LENS	DIMMING	LED	DISTRIBUTION	OPTIONS
WD1472 : Scoop Wall Mount	B : Black	Blank : Clear	Blank : Non-Dimming (120V)	Blank : 4000K	Blank : None	Blank : None
WD1473 : Trapezoid Wall Mount	W : White *	-FR : Frosted	UE-DUN : UniDim™ (120V/277V)	-T30 : 3000K	-BIV : Type IV (forward throw)	-EMAC : Emergency Back-Up
	S : Silver *					
	BZ : Bronze					

\* Special Order. Minimum order or extended lead time may apply. Consult Factory.