



CRTR6LC - 6" C-SERIES

(COB) CHIP ON BOARD BEAM CONTROL LED, RETROFIT/REMODEL
1000LM - 4000LM (10W-44W)

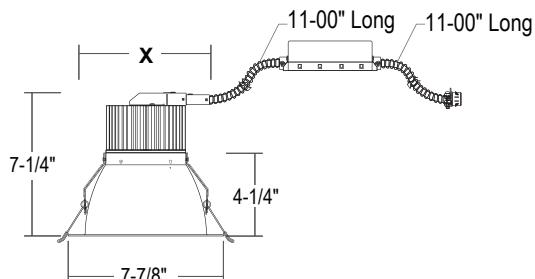

Ceiling Cut-Out X: Min. 6-5/8", Max. 7-1/8"

Ceiling Thickness: Min. 3/8", Max. 1-1/2"



- Quick connector power adapter and twist-and-lock reflector for quick access and easy maintenance
- Heavy-duty springs and self-flanged reflector
- Several lumen packages with soft even illumination
- No visible screws or hardware

ORDERING : CRTR6LC10SW-B30-T27UE-D10-JB-CHP

CRTR6LC		Fixture/Lumens	Insulation Contact	Reflector Finish	Beam Spread	CCT	Driver Options	J-Box
Fixture/Lumens	Insulation Contact							
1000lm (10W)	Non-IC	CRTR6LC10 ⁴	Insulation Contact		20° Spot	-B20 ⁵		
1500lm (15W)	ICA Rated	CRTR6LC13 ⁴	ICA ⁶		30° Narrow Flood	-B30 ⁵		
2100lm (20W)	Airtight	CRTR6LC20 ⁴			40° Flood	-B40		
2800lm (30W)		CRTR6LC26			60° Wide Flood	-B60		
4000lm (44W)		CRTR6LC35			75° Very Wide Flood	-B75 ⁵		
Fixture/Lumens		Reflector Finish		CCT		Driver Options ¹		
1000lm (10W)	CRTR6LC10 ⁴	Satin Haze Reflector/	SW	2700K (90 CRI)	-T27	0-10V Dimming	UE-D10	
1500lm (15W)	CRTR6LC13 ⁴	White Ring		2700K (97 CRI)	-T27-C97	12W Emergency Backup	UE-D10-EM	
2100lm (20W)	CRTR6LC20 ⁴	White Reflector/	WW	3000K (90 CRI)	-T30	120V ELV and Triac Dimming	-DIN	
2800lm (30W)	CRTR6LC26	White Ring		3000K (97 CRI)	-T30-C97	UniDim™ 0-10V ELV and Triac Dimming	UE-DUN	
4000lm (44W)	CRTR6LC35	All Black	BB	3500K (90 CRI)	-T35	347V	-347 ²	
		Clear Specular	CW ³	4000K (90 CRI)	-T40	0-10V Dimming (1%)	UE-D10P1	
		Reflector/White Ring		5000K (80 CRI)	-T50	Lutron HighLume	UE-DHL	
		All Satin Haze	SS			DMX 0% Dimming	-DMX	

¹ All drivers are 120V/277V unless otherwise noted.

² 347 is not available for CRTR6LC10.

³ Clear finish reflector not recommended for placing close to vertical surfaces. Uneven striations may be visible.

⁴ CRTR6LC10, CRTR6LC13, and CRTR6LC20 are IC rated for direct insulation contact.

⁵ -B20, -B30, and -B75 are not compatible with CRTR6LC35.

⁶ ICA is only available for CRTR6LC10, and CRTR6LC13.

COMPATABILITY



VR800

Round Vandal Resistant
Kit for 6"



P-CR672SW

Wall Wash for 6"



CR6-GSKT

6" Commercial
Self-Adhesive Gasket

SPECIFICATION

Application

Architectural/Commercial-grade recessed (COB) Chip on Board Beam Control LED allows for concentrated high center beam candlepower. Twist and lock TIR beam control optic is designed for easy field replacement of 20°, 30°, 40°, 60°, and 75° beam spread options.


Retrofit Mounting

Designed for use with existing 6" Architectural, Incandescent, Fluorescent, and Metal Halide Housings. Supplied with flexible metal conduit for connection to existing electrical junction box. Uses existing frame-in-kits mounting method via clips. Consult factory for special mounting methods.

Use the -JB Junction box option for remodel applications that don't have an existing housing frame or an electrical junction box close by. The retaining spring clips option allows for mounting to wood or gypsum board ceilings without the need of a frame.

Color Temperature (CCT)

Available in 2700K, 3000K, 3500K, 4000K, 90 CRI; 5000K 80 CRI; 2700K and 3000K, 97 CRI.



COLOR TEMP:	2700K	3000K	3500K	4000K	5000K
-------------	-------	-------	-------	-------	-------

CRI:	90, 97	90, 97	90	90	80
------	--------	--------	----	----	----

Insulation Contact

(CRTR6LC10), (CRTR6LC13), and (CRTR6LC20) are IC-Rated for direct insulation contact. Non-IC rated housings must be kept 3" from loose-fill insulation.

Power Connection


Our LED lamp array is replaceable via our on board quick disconnect terminal. Meets CA Title 24 Requirements and other standards restricting the use of Medium Base or Bi-Pin Sockets.

Thermal Management

Heat dissipation facilitated by a large exposed integral aluminum heat sink to maximize heat dissipation in an open-air environment. The recommended ambient temperature should be below 35°C to achieve a minimum L70 life of 50,000 hours according to the LM80 standard.

Optics

Multifaceted aluminum reflectors produces low glare illumination with multiple light control options.

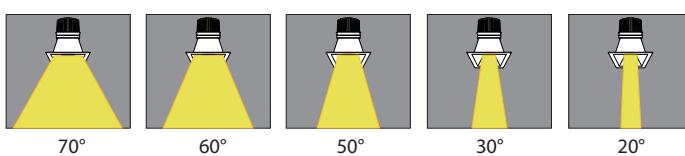


SPECIFICATION (Continued)**Reflector**

Field adjustable twist and lock reflector is easily removable to provide quick access to LED lamp array. Optional reflector (-EMA) features integral EM switch for 12W emergency backup (UE-D10-EM).

Reflector Finish

The 1-piece, self-flanged, LED design enables a clean trim finish without a secondary trim ring. Heavy gauge aluminum reflector prevents ugly dents during shipping & installation. Deeply mounted singular LED provides 50° visual cutoff. Available in Satin Haze Reflector/White Finish, White Reflector/White Finish, All Black, Clear Specular Reflector/White Finish, and All Satin Haze.

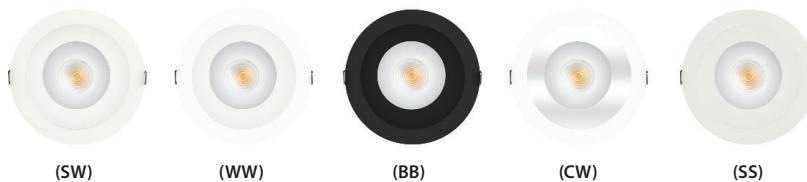**Junction Box**

16-gauge pre-wired galvanized steel Junction Box, 26 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (7) 1/2" knockouts. Strain clamps are included to install or remove covers for an easily accessed ground wire. (-CHP) option is Chicago Plenum, air-tight Junction Box.

Certifications and Listings

cETLus listed. Suitable for dry, and damp, locations. NYC approved. Calendar #41937. Conforms to City of Chicago Environmental Air CCEA-200 with Section 18-27-300.22 and special requirements Section 14-20-210C-4. Assembled in USA.

Caution

LITON recommends use of surge protectors on the power entering LED Housings. Surge damage is not covered by warranty. (+1KV).Fixtures must be grounded in accordance with national, state and/or local electrical codes. Failure to do so may result in serious personal injury.

SPECIFICATION (Continued)

Dimming Options

ELV and TRIAC Driver 120V (-DIN):

Compatible with electronic low voltage, and 2-Wire incandescent dimmers. Also known as leading edge, Reverse Phase, Forward Phase dimming. Allows smooth dimming down to 5% depending upon the dimmer's limitations.


0-10V Driver 120V/277V (UE-D10):

Compatible with most existing 0-10V systems. Also known as fluorescent or 5-Wire dimming. Allows smooth dimming down to 5% depending upon the dimmer's limitations. Compatible with daylight harvesting controls.


UniDim™ Driver 120V/277V (UE-DUN):

All in one ELV and TRIAC phase dimming (120V only), and 0-10V dimming (120V/277V). Works with most 3-Wire ELV, 2-Wire incandescent and 120V/277V 5-Wire 0-10V fluorescent dimmers.


Incandescent/Phase Wiring
ELV

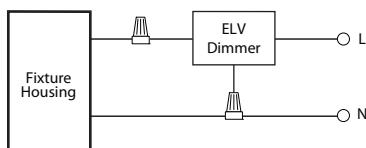


TRIAC

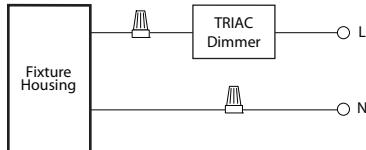


0 - 10V Wiring

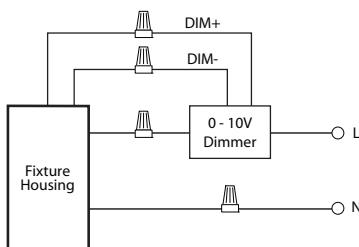


Incandescent/Phase Wiring
ELV

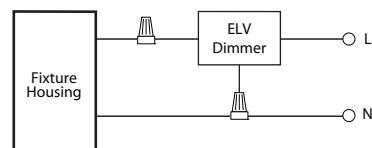


TRIAC

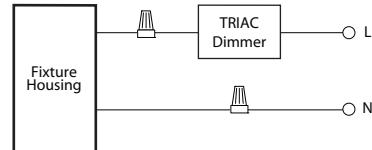

UE-D10_EM Wiring

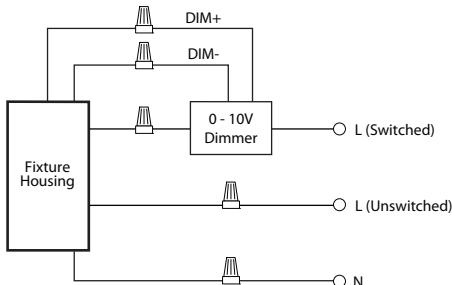

0 - 10V Wiring

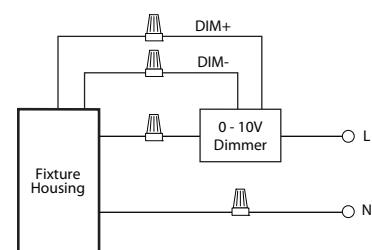

Warranty

Covered by a 5-Year Warranty to be free of defects in materials and craftsmanship.


Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.

Emergency Options

Emergency LED Battery Back-up available, remotely mounted adjacently by the installer. When AC power fails, the device immediately switches to the emergency mode, operating the LEDs for a minimum of 90 minutes. Remote test switch and plate cover included. Optional Generator Transfer Device switches the driver to auxiliary generator power during the loss of normal AC power, (recommended for applications requiring individual circuit switching).

PHOTOMETRY
CRTR6LC35SW-B20-T35UE-D10 (4000lm, 40W, 20°, 3500K)


System Power:		43W	MULTIPLIERS	
Test Date:		10/2023	REFLECTOR FINISH	
Beam Angle 50%:		24.1°	CW:	1.01
Field Angle 10%:		79.4°	SS:	0.99
Color Temperature:		3408K	SW:	1.00
CRI:		94.3	WW:	0.968
Lumens Delivered:		3754	CCT	
CBCP:		8908.5	2700K:	0.91
Power Factor:		0.99	3000K:	0.97
			3500K:	1.00
			4000K:	1.04
			Lumens	
			1000lm:	0.27
			1500lm:	0.37
			2100lm:	0.52
			2800lm:	0.70
			4000lm:	1.00

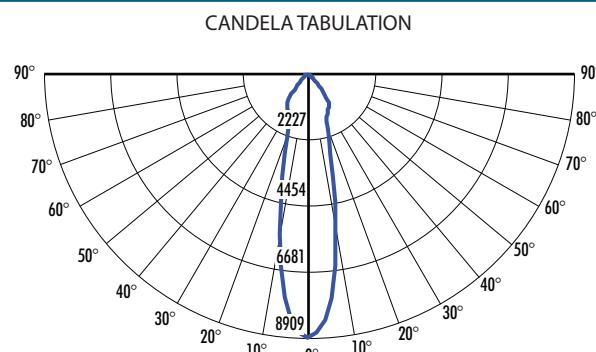
FOOTCANDLE DISTRIBUTION

Height	Beam Diameter	FC
8.0'	3.42'	139.20
10.0'	4.27'	89.09
12.0'	5.12'	61.86
14.0'	5.98'	45.45
16.0'	6.83'	34.80

CRTR6LC35SW-B30-T35UE-D10 (4000lm, 40W, 30°, 3500K)


System Power:		43W	MULTIPLIERS	
Test Date:		10/2023	REFLECTOR FINISH	
Beam Angle 50%:		34.4°	CW:	1.01
Field Angle 10%:		83.4°	SS:	0.99
Color Temperature:		3378K	SW:	1.00
CRI:		94.5	WW:	0.968
Lumens Delivered:		3799	CCT	
CBCP:		6494.6	2700K:	0.91
Power Factor:		0.99	3000K:	0.97
			3500K:	1.00
			4000K:	1.04
			Lumens	
			1000lm:	0.27
			1500lm:	0.37
			2100lm:	0.52
			2800lm:	0.70
			4000lm:	1.00

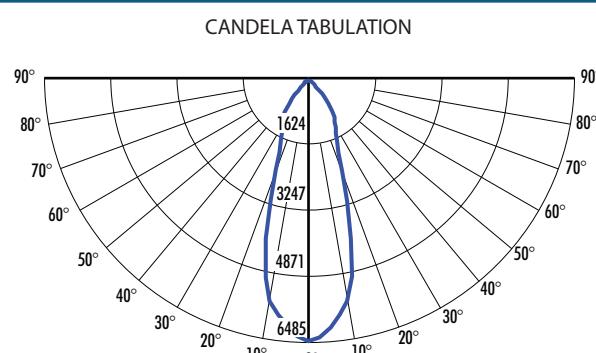
FOOTCANDLE DISTRIBUTION

Height	Beam Diameter	FC
8.0'	4.95'	101.48
10.0'	6.19'	64.95
12.0'	7.43'	45.10
14.0'	9.91'	33.14
16.0'	11.14'	25.37

CRTR6LC35SW-B40-T35UE-D10 (4000lm, 40W, 40°, 3500K)


System Power:		43W	MULTIPLIERS	
Test Date:		10/2023	REFLECTOR FINISH	
Beam Angle 50%:		41.0°	CW:	1.01
Field Angle 10%:		87.1°	SS:	0.99
Color Temperature:		3262K	SW:	1.00
CRI:		94.1	WW:	0.968
Lumens Delivered:		3008	CCT	
CBCP:		4280.6	2700K:	0.91
Power Factor:		0.99	3000K:	0.97
			3500K:	1.00
			4000K:	1.04
			Lumens	
			1000lm:	0.26
			1500lm:	0.37
			2100lm:	0.52
			2800lm:	0.71
			4000lm:	1.00

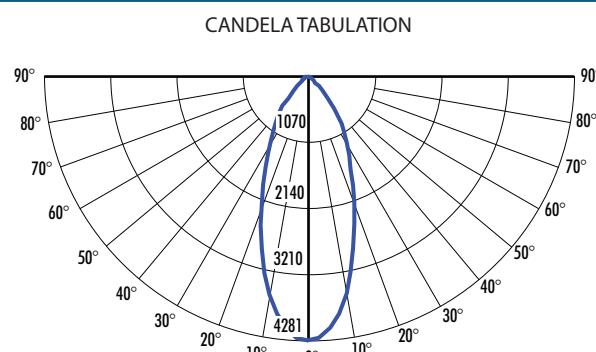
FOOTCANDLE DISTRIBUTION

Height	Beam Diameter	FC
8.0'	5.98'	66.88
10.0'	7.48'	42.81
12.0'	8.97'	29.73
14.0'	10.47'	21.84
16.0'	11.96'	16.72

CRTR6LC35SW-B60-T35UE-D10 (4000lm, 40W, 60°, 3500K)


System Power:		43W	MULTIPLIERS	
Test Date:		10/2023	REFLECTOR FINISH	
Beam Angle 50%:		64.3°	CW:	1.01
Field Angle 10%:		92.8°	SS:	0.99
Color Temperature:		3297K	SW:	1.00
CRI:		94.1	WW:	0.968
Lumens Delivered:		3779	CCT	
CBCP:		3379.2	2700K:	0.91
Power Factor:		0.99	3000K:	0.97
			3500K:	1.00
			4000K:	1.04
			Lumens	
			1000lm:	0.27
			1500lm:	0.37
			2100lm:	0.53
			2800lm:	0.70
			4000lm:	1.00

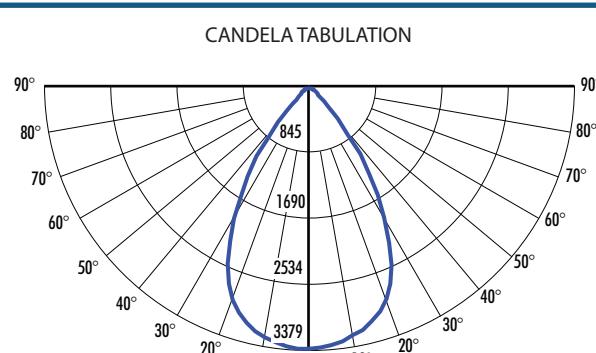
FOOTCANDLE DISTRIBUTION

Height	Beam Diameter	FC
8.0'	10.06'	52.80
10.0'	12.57'	33.79
12.0'	15.08'	23.47
14.0'	17.60'	17.24
16.0'	20.11'	13.20

PHOTOMETRY (Continued)
CRTR6LC35SW-B75-T35UE-D10 (4000lm, 40W, 75°, 3500K)

System Power:	43W	MULTIPLIERS	
Test Date:	10/2023	REFLECTOR FINISH	
Beam Angle 50%:	71.8°	CW:	1.01
Field Angle 10%:	92.9°	SS:	0.99
Color Temperature:	3346K	SW:	1.00
CRI:	94.3	WW:	0.968
Lumens Delivered:	3994	CCT	
CBCP:	3228.7	2700K:	0.91
Power Factor:	0.99	3000K:	0.97
		3500K:	1.00
		4000K:	1.04
		Lumens	
		1000lm:	0.27
		1500lm:	0.37
		2100lm:	0.53
		2800lm:	0.70
		4000lm:	1.00

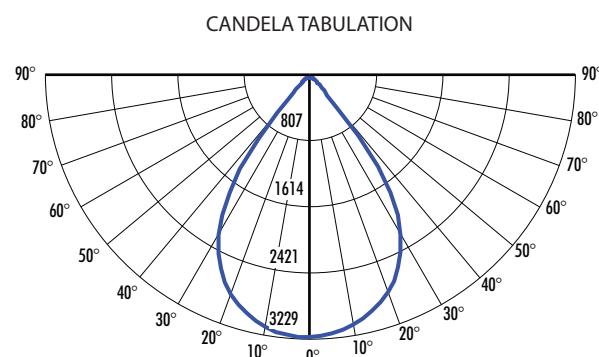

FOOTCANDLE DISTRIBUTION		
Height	Beam Diameter	FC
8.0'	11.58'	50.45
10.0'	14.48'	32.29
12.0'	17.37'	22.42
14.0'	20.27'	16.47
16.0'	23.16'	12.61