
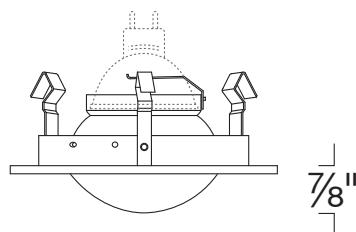


**LR1316 - DECO GLASS DOME**

3" LOW VOLTAGE TRIMS


 3 $\frac{5}{8}$ " 

 4 $\frac{3}{8}$ " 

7/8"


**SPECIFICATION**

12V/120V 50W MR16

**Application:** These attractive glass trims give class and a touch of elegance to a space that requires optimum performance. Fully lensed trims adhere to extremely damp locations, such as saunas and shower stalls. Utilizing a frosted lens can soften the light output.

**Gasket:** Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

**Lens Inclusion:** Clear glass protective safety lens included in packaging.

**Mounting:** Steel pressure springs mounted on trim to ensure positive retention inside housing.

**Ring Finish:** Die-Cast Aluminum Trim Ring Available in Chrome and Gold.

**Label:** UL Listed, cETL Listed

**COMPATIBILITY**

<a href="#">LSH1399RE</a>	<a href="#">LSH1399</a>	<a href="#">LH1399R</a>
<b>SHALLOW REMODEL HOUSING</b>	<b>SHALLOW HOUSING</b>	<b>REMODEL HOUSING</b>
<a href="#">LH1399IC</a>	<a href="#">LH3A-GU10</a>	<a href="#">LH3RA-GU10</a>
<b>IC DOUBLE WALL HOUSING</b>	<b>STANDARD HOUSING</b>	<b>REMODEL HOUSING</b>
<a href="#">LH1399</a>	<a href="#">LH3IC-GU10</a>	<a href="#">LSH1399IC</a>
<b>STANDARD HOUSING</b>	<b>IC HOUSING</b>	<b>SHALLOW IC HOUSING</b>

Note: Wattage limitations on compatible items must be met.

**FEATURE:**

**LR1316**
**RING FINISH**
**RATING**
**LR1316** **C** :Chrome

**Blank** :Damp Location

**LR1316** **G** :Gold

**-WL** :Wet Location

**ORDERING EXAMPLE : LR1316G**
**ID# : 258**