


LRLD6W-QC - 6" 800LM ECONOMY LED BAFFLE 6" LED

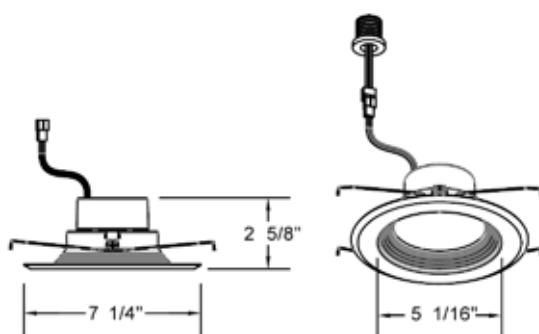

SPECIFICATION

120V LED

Application: General Purpose LED Trim for Retrofit, New Construction and Remodel Applications in low to medium height ceilings. Qualified as high efficacy for Title 24 by the California Energy Commission.

Mounting: Mounts into standard 5"/6" General Purpose Recessed housing with steel pressure springs mounted on trim to ensure positive retention inside housing.

Lumen Maintenance: Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Thermal Management: Effective thermal dissipation facilitated by integral cast-aluminum, finned heat sink design for maximum heat rejection to provide long LED life.

Driver: Electronic Direct Current driver mounted in fixture. Comes standard with dimming. Smoothly dims down to 10% with standard Incandescent and Electronic Low Voltage dimmers.

Color Temperature: Comes with 3,000K Warm White LED's binned according to ANSIC78 377A for color temperature and chromaticity ranges. Available with other color temperatures with ANSI binning between 2700K and 6500K. To order use "-T" Suffix followed by color temperature, consult factory as extended lead times and minimum order apply.

Safety Labels: ETL/CETL listed. Suitable for damp and wet locations. NYC approved: Calendar #41937.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.

COMPATIBILITY



LH7RICA-QC



6" NEW CONSTRUCTION HOUSING (QC)



6" IC FIRE-RATED LED HOUSING (9W/16W) (2-PIN ORANGE CONNECTOR)



LSHFR7-QC

6" IC 2HR FIRE-RATED LED HOUSING (SHALLOW)

Note: Wattage limitations on compatible items must be met.

LED Details:

13W 800 Lumen Package

Color Rendering Index (CRI): 90

Color Temperature: 3,000K

Lamp Equivalent: 75W BR30

Benefit:

- Singular Diffused Optics eliminate visible LEDs
- Clean one-piece, self-flanged reflector design
- Energy Star Qualified
- Performance exceeds 65W BR Lamp or 26W CFL

Title 24/JA8 Compliant

- LRLD6W-QC-T27
- LRLD6W-QC
- LRLD6W-QC-T35
- LRLD6W-QC-T40

Energy Star Qualified

- LRLD6W-QC-T27
- LRLD6W-QC
- LRLD6W-QC-T35
- LRLD6W-QC-T40

FEATURE:



ORDERING EXAMPLE : LRLD6W-QC-T27

LRLD6W-QC	FINISH	COLOR TEMPERATURE	ADAPTER
LRLD6W-QC	Blank :White Reflector/White Ring	Blank :3000K	Blank :Orange Quick Connect
		-T27 :2700K*	/S-MED-QCM :Medium Base Adapter
		-T35 :3500K	
		-T40 :4000K	

* Special Order



Tel: 323.904.0200

Product specifications subject to change without notice.

www.liton.com

