


LCMPD12RW-T30, (1000lm / 22W, 3000K, CRI: 90)


System Power	22.5W	MULTIPLIERS	
Test Date	12/26/2019	4000K	1.07
Beam Angle (50%)	112.7°	3500K	1.04
Field Angle (10%)	164.0°	3000K	1.00
Color Temperature	3000K	2700K	0.99
CRI:	90		
Lumens Delivered	1824.25		
CBCP	633		
Power Factor:	0.99		

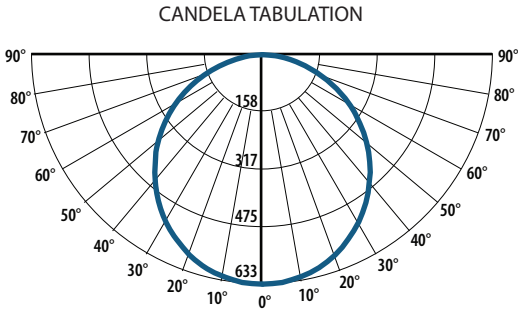

FOOTCANDLE DISTRIBUTION		
HT (Ft)	Beam Diameter	FC
6.0'	18.0'	17.6
8.0'	24.0'	9.9
10.0'	30.0'	6.3
12.0'	36.1'	4.4
14.0'	42.1'	3.2

LCMPD12RW-T40, (3000lm / 22W, 4000K, CRI: 90)

System Power	22.5W	MULTIPLIERS	
Test Date	12/26/2019	4000K	1.00
Beam Angle (50%)	112.6°	3500K	0.97
Field Angle (10%)	164.1°	3000K	0.93
Color Temperature	4000K	2700K	0.92
CRI:	90		
Lumens Delivered	1960.3		
CBCP	680		
Power Factor:	0.99		

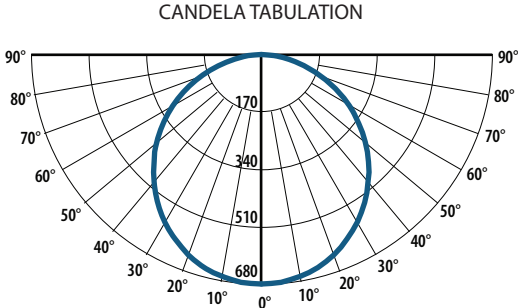

FOOTCANDLE DISTRIBUTION		
HT (Ft)	Beam Diameter	FC
6.0'	18.0'	18.9
8.0'	24.0'	10.6
10.0'	30.0'	6.8
12.0'	36.0'	4.7
14.0'	42.0'	3.5