


PROJECT INFORMATION

Type :

Project :

Catalog # :

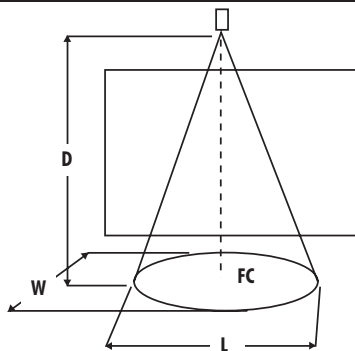

- D : Distace to the horizontal or vertical surface.
 FC : Initial foot candles at the center of the beam.
 L : Length of the beam where candle power is reduced to 50% of center beam candle power.
 W : Width of the beam where candle power is reduced to 50% of center beam candle power.

Lamp data given is typical and is based on bare lamp performance. Contact lamp manufacturers for availability and specific performance. Distance, length, and width given in decimal feet.

PAR20 Halogen E26 Medium Base



0° Aiming Angle
 Horizontal Foot candles
 D FC L W

35W PAR20 / HAL / NSP10	4	188	0.9	0.9
Beam Spread = 10°	5	120	1.1	1.1
CBCP = 3,000	6	83	1.3	1.3
Rated Life = 2,500 Hrs.	7	61	1.4	1.4

35W PAR20 / HAL / NFL30	2	200	1.3	1.3
Beam Spread = 30°	3	89	1.8	1.8
CBCP = 800	4	50	2.4	2.4
Rated Life = 2,500 Hrs.	5	32	2.9	2.9

35W PAR20 / HAL / WFL40	2	125	1.7	1.7
Beam Spread = 40°	3	56	2.4	2.4
CBCP = 500	4	31	3.1	3.1
Rated Life = 2,500 Hrs.	5	20	3.8	3.8

50W PAR20 / HAL / NSP10	4	288	0.9	0.9
Beam Spread = 10°	5	184	1.1	1.1
CBCP = 4,600	6	128	1.3	1.3
Rated Life = 2,500 Hrs.	7	94	1.4	1.4

50W PAR20 / HAL / NFL30	2	300	1.3	1.3
Beam Spread = 30°	3	133	1.8	1.8
CBCP = 1,200	4	75	2.4	2.4
Rated Life = 2,500 Hrs.	5	48	2.9	2.9

50W PAR20 / HAL / WFL40	2	138	1.7	1.7
Beam Spread = 40°	3	61	2.4	2.4
CBCP = 550	4	34	3.1	3.1
Rated Life = 2,500 Hrs.	5	22	3.8	3.8