


PROJECT INFORMATION

Type :

Project :

Catalog # :

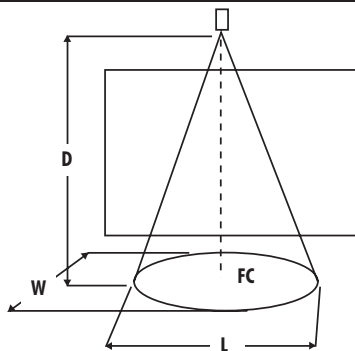

- D : Distace to the horizontal or vertical surface.
 FC : Initial foot candles at the center of the beam.
 L : Length of the beam where candle power is reduced to 50% of center beam candle power.
 W : Width of the beam where candle power is reduced to 50% of center beam candle power.

Lamp data given is typical and is based on bare lamp performance. Contact lamp manufacturers for availability and specific performance. Distance, length, and width given in decimal feet.

PAR30 Halogen E26 Medium Base



0° Aiming Angle
 Horizontal Foot candles
 D FC L W

50W PAR30 / NSP7
 Beam Spread = 7°
 CBCP = 17,000
 Rated Life = 3,000 Hrs.

5	1065	0.6	0.6
6	472	0.8	0.8
9	266	1.1	1.1
10	170	1.4	1.4

50W PAR30 / NFL25
 Beam Spread = 25°
 CBCP = 3,000
 Rated Life = 3,000 Hrs.

5	189	1.8	1.8
6	85	2.8	2.8
9	47	3.7	3.7
11	31	4.8	4.8

50W PAR30 / FL35
 Beam Spread = 35°
 CBCP = 1,600
 Rated Life = 3,000 Hrs.

4	101	2.5	2.5
7	45	4.1	4.1
8	26	5.5	5.5
10	17	6.8	6.8