


WD1360 : 6" ROUND 1-DIRECTION

WALL MOUNT (IP65) 1000lm - 2600lm (15W/22W/22W/30W)

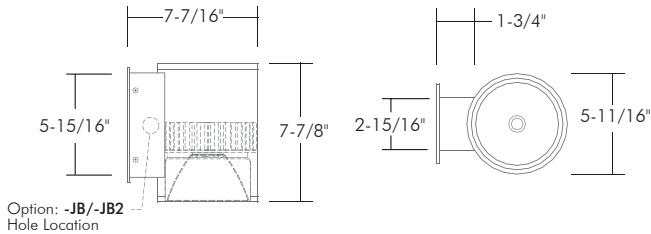

- Now with Integral Emergency Option!
- Photocell Sensor available
- Uniform, low glare illumination
- Durable, corrosion resistant finish
- Singular COB Light Source
- 5-Year Limited Warranty
- Available with Type IV/Forward Throw Optics
- UniDim™ option dimming with 2-Wire Incandescent, 3-Wire, ELV or 0-10V Controls
- Integral JBOX Option

ORDERING : WD1360B-L15B-B02-TAM-EMAC-BLANK

WD1360

Fixture	Finish	Lumen	Optics	Dimming	Emergency Options	LED	Options
Finish		Optics		Dimming		LED	
White (RAL 9003)	W	<i>Standard Beams</i>		Non-Dimming (120V)	Blank	4000K (90 CRI)	Blank
Silver (RAL 7037)	S	Wide Flood	Blank	ELV and Triac Dimming (120V)	-DIN⁵	2700K (90 CRI)	-T27
Basic Bronze (RAL 8019)	BZ	Narrow Spot	-B10	0-10V Dimming (120V/277V)	UE-D10⁵	2700K (97 CRI)	-T27-C97³
Black (RAL 9005)	B	Spot	-B20	UniDim™ (120V/277V)	UE-DUN⁵	3000K (90 CRI)	-T30
Light Silver (RAL 7036)	LS*	Flood	-B45	0-10V 1% Dimming (120V)	-D10P1	3000K (97 CRI)	-T30-C97³
Dark Grey (RAL 7015)	DG*	<i>CleanBeam™ Option</i>		347V 0-10V Dimming	347-D10	3500K (90 CRI)	-T35
Metallic Gold (RAL 1001)	MG*	10° Pencil Beam	-B02	Emergency Options		5000K (90 CRI)	-T50
Metallic Black (RAL 7021)	MB*	15°	-CB15	Remote	-EMAC	590nm AMBER	-TAM²
Lumen¹		35°	-CB35	BackPack (Side Mount)	-EMB-SD	RGB+W Control (24VDC)	-RGBWV24⁴
1000lm (15W)	Blank	<i>Specialty Beams</i>		BackPack (Face Mount)	-EMB-FC	Options	
1500lm (22W)	-L15	Wall Wash	-WW	BackPack (Empty)	-EMB-BLANK⁸	None	Blank
2200lm (22W)	-L20	Forward Throw (Type IV)	-IV			Hex-Cell Louver	-LVR
2600lm (30W)	-L26	Type IIVS (110°x 40°)	-BII			Photocell Sensor 120V,277V	-SDL
						Integral Junction Box 1-Entry	-JBL, JBR⁶
						Integral Junction Box 2-Entries	-JB2
						Junction Box, Conduit Top Entry	-JBT
						Surge Protector	-SRG
						Cold Weather	-CW⁷
						Glare Shield	-SH

¹ (Blank) 1000lm (15W) color temperature is 80CRI minimum, and is not available in 90 plus CRI. (-L15) 1500lm (22W), (-L20) 2200lm (22W), and (-L26) 2600lm (30W) are 90CRI minimum with optional 97CRI.

² (-TAM) 590nm AMBER is only available with (Blank) Wide Flood Optic.

³ Special Order. Extended lead time may apply. Consult Factory

⁴ Remote Power Supplies and Control Gear Required, Available with Wireless Bluetooth or DMX Control. Consult Factory for Details.

⁵ Standard driver starting temp. -10°C/14°F.

⁶ Select left or right entry; see pg 5.

⁷ Starting temperature -30°C/-22°F; see pg 6.

⁸ Blank EM enclosure available for Non-EM units to provide a seamless design aesthetic when EM enabled products are installed.

*Special Order. Minimum order, extended lead time may apply. Consult factory. (Finish options 50 piece minimum. 10-12 week lead time)

347V Input with 0-10V Dimming available. Consult factory for lead times.

(Click for more Information)



[View Full Detailed Specification Sheet](#)