


WD1Q340: 4" SQUARE

1-DIRECTION WALL MOUNT (IP65) 850LM (15W)

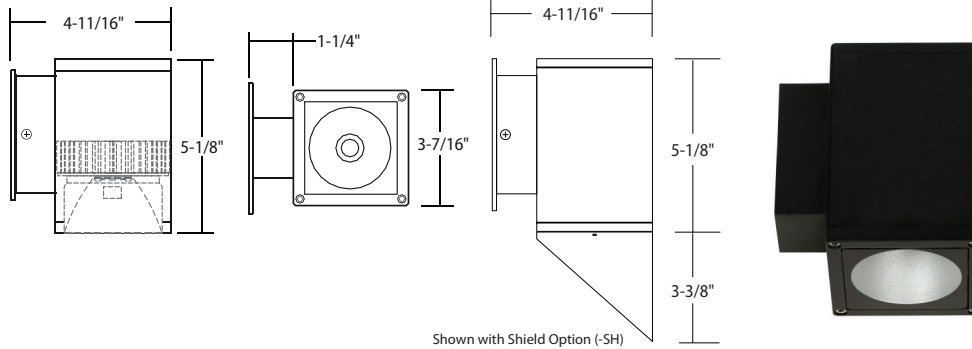

Now with Integral Emergency Option!

- Uniform, low glare illumination
- Durable, corrosion resistant finish
- Singular COB Light Source
- 5-Year Limited Warranty
- 9 Ft Mtg Ht. 20 Ft O.C. Spacing (800 Lumen Package)
- 18 Ft Mtg Ht. 20 Ft O.C. Spacing (800 Lumen Package)
- UniDim™ option dimming with 2-Wire Incandescent, 3-Wire, ELV or 0-10V Controls
- Photocell available
- Available with Type IV/Forward Throw Optics

ORDERING : WD1Q340W-B02UE-DUN-T17-LVR

WD1Q340

Fixture	Finish	Lumen	Optics	Dimming	Emergency Options	LED	Options	
Finish		Optics		Dimming		LED		
White	(RAL 9003) W	850lm (15W)	<i>Standard Beams</i>	Non-Dimming (120V)	Blank	4000K (90 CRI)	Blank	
Silver	(RAL 7037) S		Wide Flood	Blank			2700K (90 CRI)	-T27
Basic Bronze	(RAL 8019) BZ		Narrow Spot	-B10	ELV and Triac (120V)	-DIN⁴	2700K (97 CRI)	-T27-C97⁷
Black	(RAL 9005) B		Spot	-B20	UniDim™(120V/277V)	UE-DUN⁴	3000K (90 CRI)	-T30
Light Silver	(RAL 7015) LS²		Flood	-B45	0-10V (120V/277V)	UE-D10⁴	3000K (97 CRI)	-T30-C97⁷
Dark Grey	(RAL 7036) DG²				347V 0-10V Dimming	347-D10	3500K (90 CRI)	-T35
Metallic Gold	(RAL 1001) MG²		<i>CleanBeam™ Option</i>		Emergency Options		5000K (80 CRI)	-T50
Metallic Black	(RAL 7021) MB²		10° Pencil Beam	-B02	Remote	-EMAC	RGB+W Control (24VDC)	-RGBWV24*
Lumen¹			15°	-CB15	BackPack (Side Mount)	-EMB-SD	Options	
			35°	-CB35	BackPack (Face Mount)	-EMB-FC	None	Blank
			<i>Specialty Beams</i>	BackPack (Empty)	-EMB-BLANK⁸	Black Hexcell Louver	-LVR	
			Wall Wash			Cold Weather Start	-CW³	
			Forward Throw (Type IV)	-IV		Surge Protector	-SRG	
			Type IIVS (110°x 40°)	-BII		Photocell Sensor	-SDL	
						Glare Shield	-SH	

¹ (Blank) 850lm (15W) color temperature is 80CRI minimum, and is not available in 90 plus CRI. (-L13) 1300lm (22W) is 90CRI minimum with optional 97CRI.

² Special Order. Minimum order, extended lead time may apply. Consult factory. (Finish options 50 piece minimum. 10-12 week lead time).

³ CW Starting Temperature -30°C/-22°F; see page 6.

⁴ Standard Driver starting Temp. -10°C/14°F; see page 6.

⁵ See LED selection and necessary special provision for certain CRI selection.

⁷ Special Order. Minimum order, extended lead time may apply. Consult factory.

⁸ Blank EM enclosure available for Non-EM units to provide a seamless design aesthetic when EM enabled products are installed.

* Remote Power Supplies and Control Gear Required, Available with Wireless Bluetooth or DMX Control. Consult Factory for Details.

(Click for more Information)



[View Full Detailed Specification Sheet](#)